




Pentalift Model HFR32 Vehicle Restraint Safety System
Creates a safe, efficient and productive loading dock environment

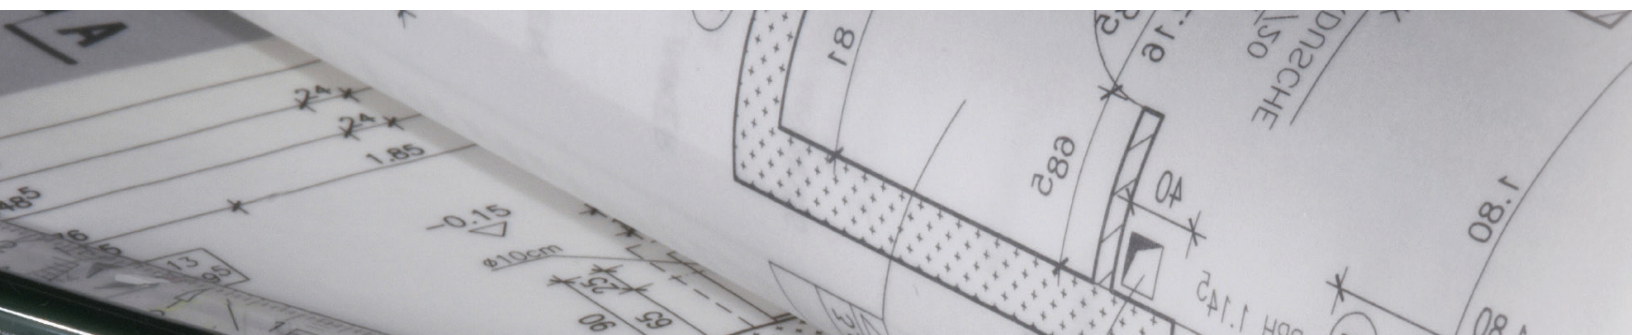

Engineered for Safety

Direct and indirect costs of an industrial accident at the loading dock can easily exceed \$1,000,000 and result in increased insurance costs. The Pentalift HFR32 vehicle restraint safety system reduces the potential for such an accident.

The Pentalift model HFR32 vehicle restraint safety system offers rugged design, simple and reliable hydraulic operation, minimal maintenance and maximum product value. The loading dock has been rated as one of the most hazardous areas within most facilities. Serious loading dock accidents can result from such things as premature truck departure, trailer creep and collapsing landing gear on spotted trailers. The Pentalift model HFR32 vehicle restraint safety system is a proven solution to loading dock safety concerns. The reliable hydraulic operation promotes continued use by the dock attendant. The 10-1/2" lowered height accommodates trailers with increasingly lower rear impact guards (R.I.G.).

Features:

Proven hydraulic operation ensures that the vehicle restraint will function reliably, in the toughest environments. This is very important based on the harsh environment that most restraints are subjected to. Hydraulic systems have been proven to be extremely reliable and durable. Due to this, hydraulic systems are the activation method of choice in industries such as aircraft and heavy construction equipment.

Signal Bar requires approximately 30 lbs of pressure to activate, thereby eliminating false engagement signal.

Heavy - Duty mounting plate ensures simple yet secure installation.

PTFE bushings in combination with hard chrome plated pins for reduced maintenance, on all pivot points.

Watertight and corrosive duty limit switches are suited for harsh applications.

Dual side-by-side hook arrangement effectively increases the rear impact guard holding strength and the restraining capacity of the restraint. 100,000 PSI yield high strength steel on structural arms and hooks.

10-1/2 inch Lowered Height and operating range of 10 1/2" to 28 1/2". facilitates "No impact" operation. Accommodates lower vehicle Rear Impact Guards and meets 1998 NHTSA rear impact guard bar regulations for trailers.


Return spring ensures positive retraction of locking assembly.

32,000 lb restraining capacity.

Flood resistant, standard design and construction ensures reliable operation even if the unit has been submerged. Other manufacturers offer this feature as an option or not at all.

Note: Vehicle restraint is shown in a partially raised position.

Rugged structural guard protects the restraint components from impacts such as snow removal equipment and yard trucks. "Open" guard design allows dirt and debris to naturally move away from restraint components as opposed to competitive designs with boxed in housings that retain and hold dirt and debris that fall into the restraint. With other manufacturers restraints, the boxed in housing causes cleaning of the restraint to be more involved and more frequent.

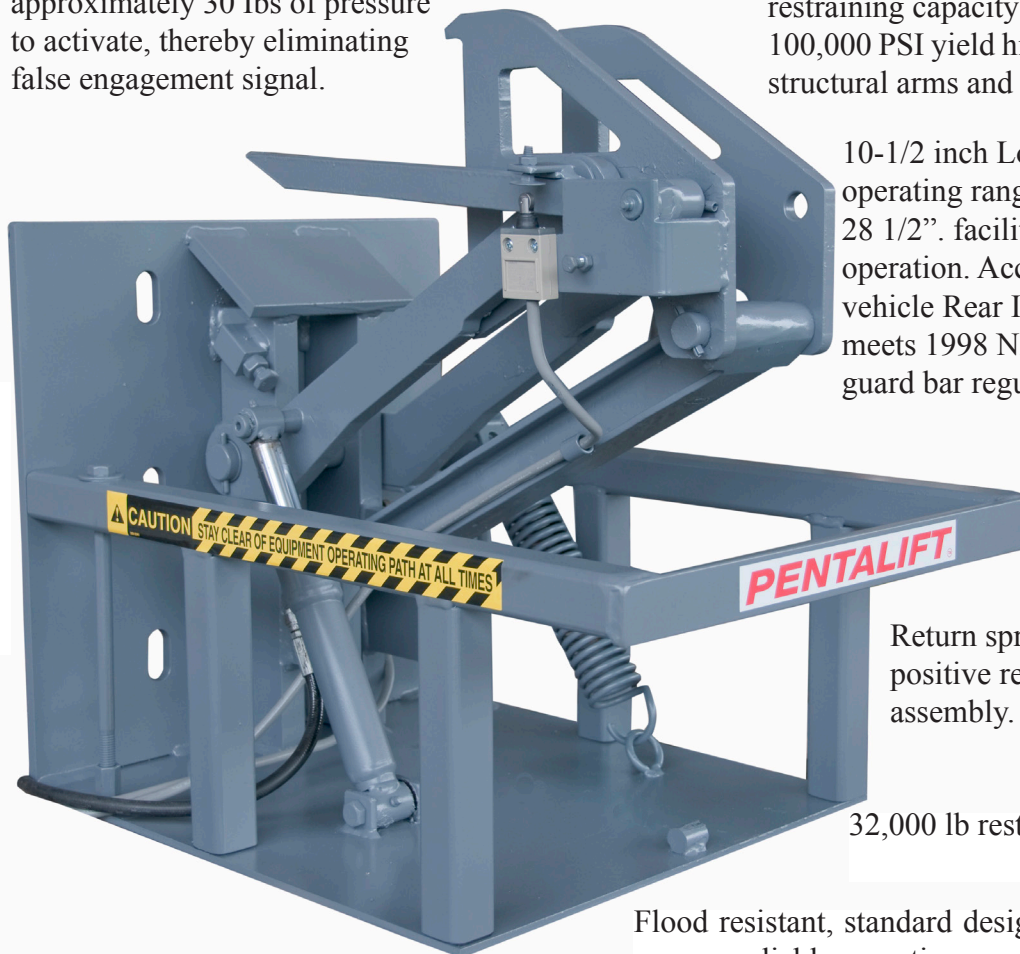

Communication System Components



Interior sign directs lift truck operator to load/unload on green light signal only.

Exterior high visibility, LED deluxe lights and dual image safety yellow instruction signs are provided as standard. Narrow width of light and signs facilitates easy installation between dock seal side pads. LED lights ensure long, reliable and energy efficient operation.

Control Panels




NEMA 12 interior wall mount control station. High visibility interior signal lights are coordinated with exterior signal lights. Clear, concise and easy to follow instructions guide dock attendant on how to use the system. Selector switch and amber light accommodate "override" mode. CSA certified for the design and manufacturer of industrial control equipment.



Combination control panels combine the controls for loading dock equipment such as vehicle restraint system, hydraulic dock leveler, overhead door and inflatable dock shelter into a single common panel. This ensures proper use and sequencing of equipment for increased safety and ease of operation.

Reliable Hydraulics

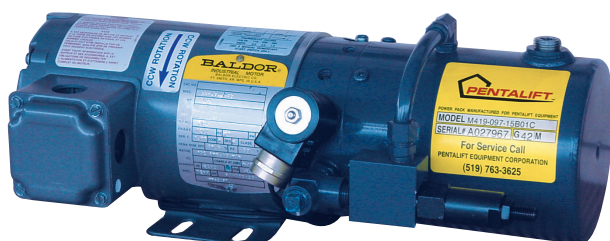

Hydraulic power unit is compact and easily installed on interior wall of loading dock or under the dock leveler. Internal wall mount installation safely positions motor and pump assembly away from the elements, condensation and the potential impact of an incoming vehicle. When purchased in conjunction with a Pentalift hydraulic dock leveler, the operation of the Pentalift model HFR32 vehicle restraint safety system and hydraulic dock leveler are combined into one single hydraulic power unit for decreased maintenance and increased reliability.

The Pentalift HFR32's 32,000 Ib pull rating offers protection against:

- Unscheduled truck / trailer departure
- Excessive trailer creep
- Landing gear collapse

Increase Loading Dock Safety Further using Pentalift's Roll Off Stop Dock Leveler:



Pentalift's Series "HDRS" Roll-Off Stop Lip hydraulic dock levelers feature all of the design, structural and operational benefits of Pentalift Hydraulic dock levelers, with the added safety enhancement of a Roll-Off Stop Lip. The Roll-Off Stop Lip is a formidable barrier. It prevents lift truck roll-off from the loading dock, whenever the dock leveler is in the parked positioned.

The Roll-Off Stop Lip also serves to protect roll-up doors on truck trailers positioned at the loading dock from impact and damage.

For more information visit our website at the page: www.pentalift.com/loading-docks/roll-off-stop.php

"Our Primary Goal is to engineer and build the best products to ensure the ultimate in user safety and product reliability"

*Paul Pedersen
President
Pentalift Equipment Corporation*

Individual Product Catalogs are available and can also be found on our website.
Pentalift also manufacturers a complete line of Lift Tables for your in plant material handling needs.

Note: Some photos may reflect products with optional features. All Pentalift Equipment Corporation products are subject to design improvement through modification without notice.

Pentalift Equipment Corporation
P.O. Box 1060, Guelph, ON N1H 6N1 Canada P.O. Box 1510, Buffalo, NY 14240 – 1510 USA
Phone: (519) 763 3625 Fax: (519) 763 2894
www.pentalift.com

0414D038 Printed in Canada